
CP-104EL-A Series

4-port RS-232 low-profile PCI Express board



Features and Benefits

- PCI Express 1.0 compliant
- 921.6 kbps maximum baudrate for fast data transmission
- 128-byte FIFO and on-chip H/W, S/W flow control
- Low-profile form factor fits small-sized PCs
- Drivers provided for a broad selection of operating systems, including Windows, Linux, and UNIX
- Easy maintenance with built-in LEDs and management software

Certifications

CE FC

Introduction

The CP-104EL-A is a smart, 4-port PCI Express board designed for POS and ATM applications. It is a top choice of industrial automation engineers and system integrators, and supports many different operating systems, including Windows, Linux, and even UNIX. In addition, each of the board's 4 RS-232 serial ports supports a fast 921.6 kbps baudrate. The CP-104EL-A provides full modem control signals to ensure compatibility with a wide range of serial peripherals, and its PCI Express x1 classification allows it to be installed in any PCI Express slot.

Smaller Form Factor

The CP-104EL-A is a low-profile board that is compatible with any PCI Express slot. The board requires only a 3.3 VDC power supply, which means that the board fits any host computer, ranging from shoebox to standard-sized PCs.

Drivers Provided for Windows, Linux, and UNIX

Moxa continues to support a wide variety of operating systems, and the CP-104EL-A board is no exception. Reliable Windows and Linux/UNIX drivers are provided for all Moxa boards, and other operating systems, such as WEPOS, are also supported for embedded integration.

Specifications

Serial Interface

Comm. Controller	16C550C compatible
Bus	PCI Express 1.0
Connector	DB44 female
FIFO	128 bytes
Max. No. of Boards per PC	8
No. of Ports	4
Serial Standards	RS-232
Bitrate	50 bps to 921.6 kbps (supports non-standard baudrates)
Data Bits	5, 6, 7, 8
Stop Bits	1, 1.5, 2

Parity	None Even Odd Space Mark
Flow Control	None RTS/CTS XON/XOFF

Serial Signals

RS-232	TxD, RxD, RTS, CTS, DTR, DSR, DCD, GND

Serial Software Features

Windows Drivers	Windows 95/98/ME/NT/2000, Windows XP/2003/Vista/2008/7/8/8.1/10/11 (x86/x64), Windows 2008 R2/2012/2012 R2/2016/2019 (x64)/2022, Windows Embedded CE 5.0/ 6.0, Windows XP Embedded
Linux Drivers	Linux kernel 5.x Linux kernel 4.x Linux kernel 3.x Linux kernel 2.6.x Linux kernel 2.4.x
UNIX Drivers	QNX 6 Solaris 10 UnixWare 7 SCO OpenServer 5 SCO OpenServer 6
Arm®-based Platform Support	Linux Kernel 5.x / 4.x

Power Parameters

Input Current	805 mA @ 3.3 VDC

Physical Characteristics

Dimensions	67.21 x 103 mm (2.65 x 4.06 in)

LED Interface

LED Indicators	Built-in Tx, Rx LEDs for each port

Environmental Limits

Operating Temperature	0 to 55°C (32 to 131°F)
Storage Temperature (package included)	-20 to 85°C (-4 to 185°F)
Ambient Relative Humidity	5 to 95% (non-condensing)

Standards and Certifications

EMC	EN 55032/35
EMI	CISPR 32, FCC Part 15B Class B
EMS	IEC 61000-4-2 ESD: Contact: 4 kV; Air: 8 kV IEC 61000-4-3 RS: 80 MHz to 1 GHz: 3 V/m IEC 61000-4-4 EFT: Power: 1 kV; Signal: 0.5 kV IEC 61000-4-5 Surge: Power: 2 kV IEC 61000-4-6 CS: 150 kHz to 80 MHz: 3 V/m; Signal: 3 V/m IEC 61000-4-8 PFMF

Declaration

Green Product	RoHS, CRoHS, WEEE

MTBF

Time	3,601,447 hrs
Standards	Telcordia (Bellcore) Standard TR/SR

Warranty


Warranty Period	5 years
Details	See www.moxa.com/warranty

Package Contents

Device	1 x CP-104EL-A Series serial board
Cable	CP-104EL-A-DB9M: 1 x M44 to 4 x DB9-M cable, 50 cm CP-104EL-A-DB25M: 1 x M44 to 4 x DB25-M cable, 50 cm
Documentation	1 x quick installation guide 1 x warranty card

Dimensions

Unit: mm (inch)

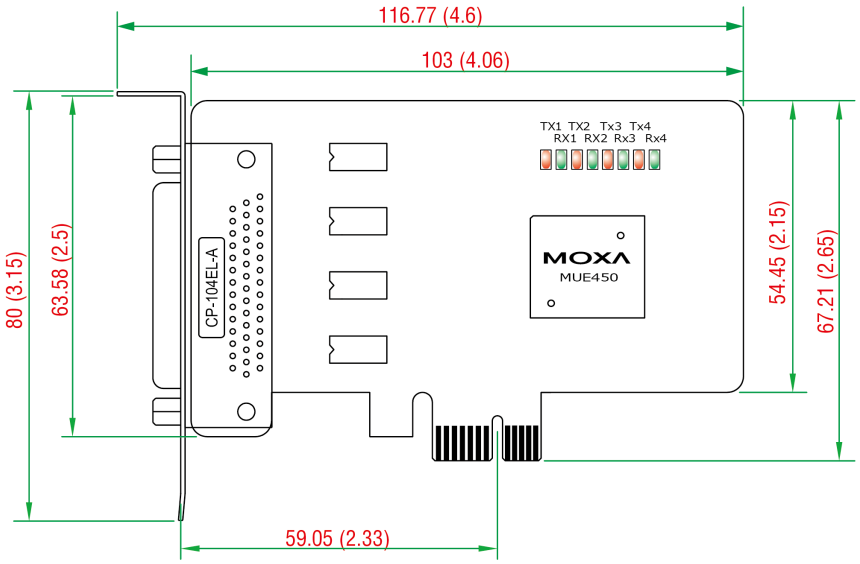

Ordering Information

Model Name	Serial Standards	No. of Serial Ports	Included Cable
CP-104EL-A-DB25M	RS-232	4	CBL-M44M25x4-50
CP-104EL-A-DB9M	RS-232	4	CBL-M44M9x4-50

Accessories (sold separately)

Cables

CBL-M44M9x4-50	DB44 male to DB9 male serial cable, 50 cm
CBL-M44M25x4-50	M44 to 4 x DB25 male serial cable, 50 cm
CBL-F9M9-150	DB9 female to DB9 male serial cable, 1.5 m
CBL-F9M9-20	DB9 female to DB9 male serial cable, 20 cm

© Moxa Inc. All rights reserved. Updated Oct 30, 2026.

This document and any portion thereof may not be reproduced or used in any manner whatsoever without the express written permission of Moxa Inc. Product specifications subject to change without notice. Visit our website for the most up-to-date product information.